



Shenzhen Mooncell Electronics Co., Ltd

Commercial Led Display Controller Series

MB6 Product Specifications



1 Product Overview

Product Introduction

MB6 Media Player features high performance 8 Core CPU and it's a combination of the Player with the Sending Card(Integration). Given that the Player has a very high performance of the video processing, and by contrast, the price of the MB6 Media Player is very competitive. MB6 is quite small in size and low in power consumption and is suitable for a wide temperature range with easy installation and handy maintenance. MB6 supports 4 network outputs, the maximum loading capacity could reach up to 2.3 million pixels, widest:3840/highest 2160.

Product Features

- 1.it supports the switching between synchronous and asynchronous.*
- 2.it supports HDMI Loop Out*
- 3.it supports H.265 Hard Decoding.*
- 4.it supports cloud cluster control management.*
- 5.Android 7.1 OS supported.*
- 6.Mobiles,IPad,LAN,PC are supported to control the programs & the led screens.*
- 7.WIFI Connection & WIFI Hotpot Connection are supported.*
- 8.Low Power Consumption, Low Heat Radiation, Stable & Reliable Performance and is suitable for wide temperature range.*
- 9.Small Size & Light Weight with Easy Installation & Convenient Maintenance.*

Application Scenarios

It could be widely used at business display area(fields) such as : Fixed Installation LED Display, Intelligent Lamppost Led Display, Over-door Led Display, Vehicle-Mounted Led Display, Chain Stores Cluster Display Management, Led Electronic Whiteboard, Led Mirror(Mirror-like Led Display), Advertise Led Display, and the Led Display that does not need to be used with the PC(Offline Mode).



2 Function Introduction

- *It supports HD videos, Pictures (Images), TXT, Weather Info, Clock and a variety of programs.*
- *It supports to have the multiple windows, the size & position of the windows could be set as you wish and the window overlay is supported.*
- *LAN, WIFI, 4G, etc. are supported.*
- *Applications for Android and IOS are available.*
- *PC, Mobile Phones and Pad are supported to be used to control and manage with the programs and its parameters.*
- *The RS485 Sensor Interface could be supported to monitor the temperature, humidity, lightness and some other environmental situations (parameters).*
- *The brightness of the led display could be automatically adjusted.*
- *Using the Network Time Protocol (NTP) to synchronize the Time (To get the accurate Time).*
- *It supports to have multiple displays to work simultaneously (synchronized).*
- *It supports Monitor HDMI output so that it could be used as the Monitor output, or it could be also used for LED+LCD combined Networks.*
- *It supports to use the USB Flash disk to update the programs, plug and play, you can also use the Ethernet to update and manage with the programs.*
- *It supports to automatically adjust the brightness or set the schedule to have the brightness automatically adjusted.*
- *It supports to play the programs as in “player list” orders.*
- *Through the Management System, you can have a cluster of settings for it's On/Off at a certain time. (Timer).*
- *It supports synchronous and asynchronous switching.*
- *It supports HDMI Input and HDMI Loop Output.*
- *it supports H.265 Hard Decoding. High Definition Hard Decoding Play.*
- *it supports cloud cluster control management. You don't have to be on site to configure you screen.*



Audio & Video Performance:

<i>Programs Partition</i>	<i>The Programs Windows could be partitioned as you wish, and the same with the superposed windows.</i>
<i>Video Format</i>	<i>AVI, WMV, MPG, RM/RMVB, MOV, DAT, VOB, MP4, FLV, etc.</i>
<i>Audio Format</i>	<i>MPEG-1 Layer III, AAC, etc.</i>
<i>Image Format</i>	<i>BMP, JPG, PNG, etc.</i>
<i>TXT Format</i>	<i>TXT, RTF, WORD, etc.</i>
<i>TXT Display</i>	<i>Single-Line TXT, Static TXT, Multi-Line TXT</i>
<i>Image Partition</i>	<i>It supports Video, Image, Scrolling Caption, LOGO, Data and Time; the images could be partitioned as you wish.</i>
<i>OSD Supported</i>	<i>It supports 32bit True Color OSD, it could be displayed at any position, it supports the video, image and TXT to be played together at the same time, the image or TXT could be superposed on the videos, it supports transparent, semi-transparent, opaque effects.</i>
<i>RTC(Real Time Clock)</i>	<i>Real Time Clock Display and Management</i>

Terminal Management:

<i>Network Communication</i>	<i>LAN/WIFI/4G</i>
<i>Programs Update</i>	<i>USB Flash Disk Plug and Play, Terminal Ethernet Management</i>
<i>Device Management</i>	<i>PC, Android, IOS and some other Smart Terminal Devices</i>
<i>Wireless Control</i>	<i>Brightness Real Time Adjustment, On/Off Display, System Parameters</i>



	<i>Settings, Programs Play Management, Wireless Sending the Programs</i>
<i>Brightness Automatically Adjustment</i>	<i>The brightness could be automatically adjusted based on the real time environmental situations or the set schedules.</i>
<i>Fixed(Set) Time Playing/Timing Playing</i>	<i>To play the programs as in “player list” orders.</i>
<i>Timing Switch On/Off</i>	<i>Through the Management System to get the centralized setting.</i>
<i>Management Software</i>	<i>The Application is supported to be used on any Android or IOS devices.</i>



3 Product Parameters

Basic Parameters

<i>Performance Parameters</i>	<i>Processor:8 Core CPU Memory:2G DDR3 Flash Memory: 8G EMMC Resolution: H.265 4K Hard Decode Playing</i>
<i>Network Accesses</i>	<i>LAN,WIFI AP,STATION,4G Module</i>
<i>Processing Performance</i>	<i>The Network Port Loads 2.3 Million Pixels The Maximum Length:3840 Pixels The Maximum Height:2160 Pixels</i>
<i>Receiving Card Supported</i>	<i>Mooncell Receiving Cards</i>



Hardware Introduction



Front Panel

Interface Introduction:

<i>Interface Name</i>	<i>Interface Introduction</i>
<i>DC 5V</i>	<i>Power Input Interface:5.5*2.5MM</i>
<i>AUDIO</i>	<i>1/8 " (3.5mm)TRS Audio Output</i>
<i>LAN</i>	<i>LAN Ethernet Access(100M Ethernet)</i>
<i>USB</i>	<i>USB Interface(2x),USB Flash Disk or some other devices could be connected to the USB Interface.</i>
<i>WIFI</i>	<i>WIFI Antenna Interface</i>
<i>4G</i>	<i>4G Antenna Interface(Optional)</i>



Web:www.mooncell.com.cn

ADD:1st Floor,Comprehensive Building, Baoshi South Road,Shiyan Town,
Baoan District, Shenzhen,PRC

Backside Panel



<i>Name</i>	<i>Illustration</i>
<i>LEDOUT</i>	<i>4x Gigabit Ethernet Ports Transfer the signal to the receiving card</i>
<i>HDMI IN/OUT</i>	<i>1x HDMI IN/ Output</i>
<i>CONFIG</i>	<i>B Type USB interface to Set the Parameters of the LED Display</i>
<i>SENSOR</i>	<i>Light Sensor Interface</i>
<i>SIM</i>	<i>Micro SIM Card, 4G Mobile Phone Card</i>


Indicator Introduction:

<i>Name</i>	<i>Indicator Specifications</i>
<i>4G</i>	<i>4G Indicator, While the 4G is connected, the 4G indicator will be long lasting on.</i>
<i>WIFI</i>	<i>WIFI Indicator, While the WIFI is connected, the WIFI indicator will be long lasting on.</i>
<i>PWR</i>	<i>Power Indicator, while the power is on, the indicator goes long lasting on.</i>
<i>SYS</i>	<i>System Indicator, while the system is properly running, the indicator goes flashing.</i>



Dimensions:

Unit:mm

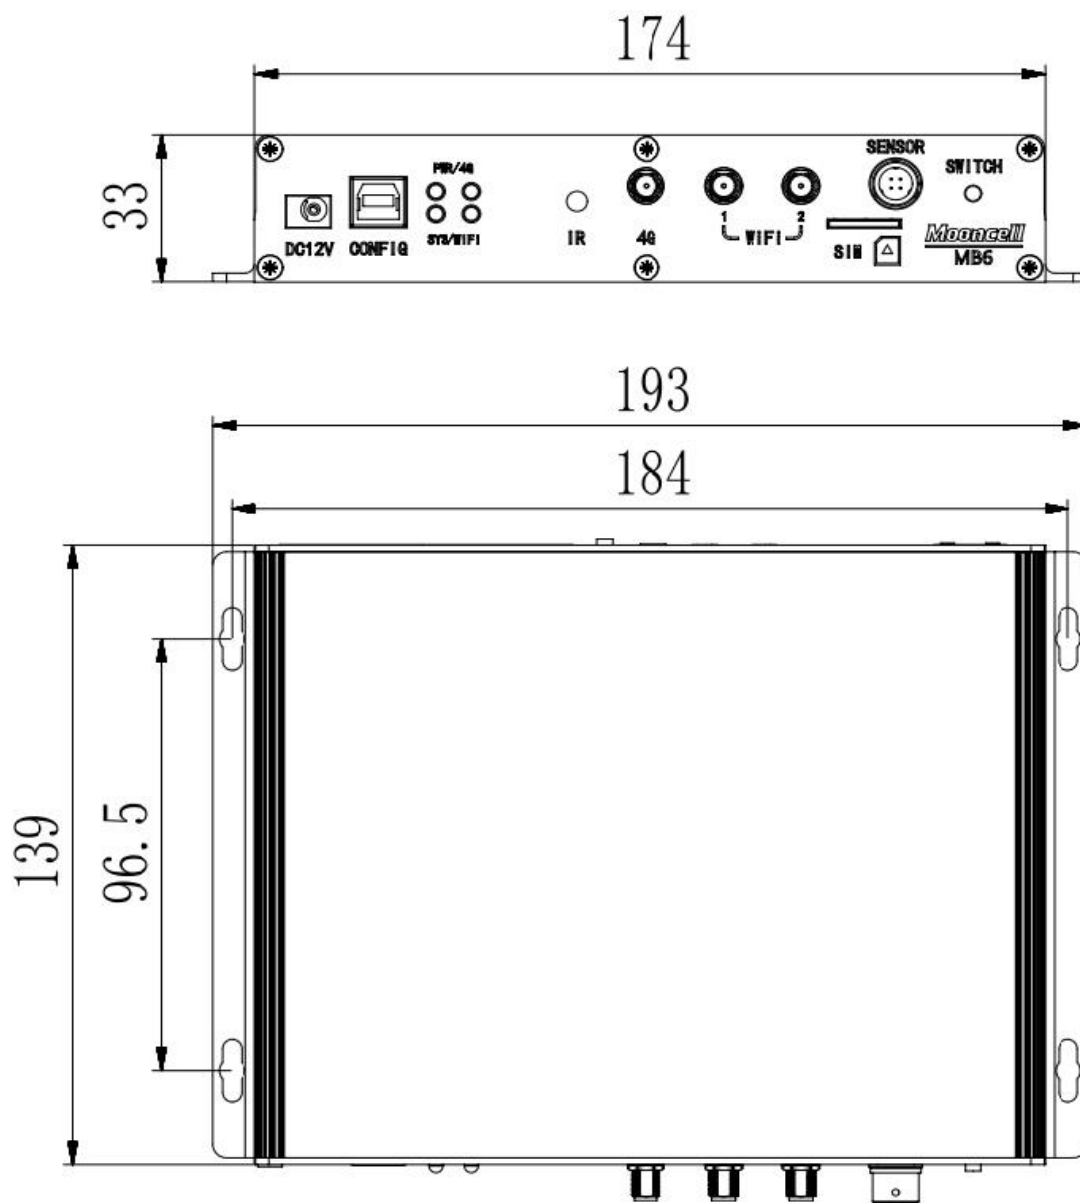

4 Product Specifications

Specifications

<i>Electric Parameters</i>	<i>Input Voltage</i>	<i>12V</i>
	<i>Rated Power</i>	<i>15W</i>
<i>Operating Environment</i>	<i>Operating Temperature</i>	<i>-20°C - 70°C</i>
	<i>Operating Humidity</i>	<i>10%RH-90%RH No Solidification</i>
<i>Dimensions</i>	<i>193mmX139mmX33mm</i>	
<i>Net Weight</i>	<i>1Kg</i>	
<i>Packaging Info</i>	<i>Standard List</i>	<i>USB Cable 、 Wi-Fi Antenna 2x 、 12V/2A Power Adapter (5.5mm×2.5mm Standard Interface)</i>
	<i>Optional List</i>	<i>4G Module</i>

Precautions

- 1. The installation should be done by the professionals.*
- 2. It has to be anti static.*
- 3. Water proof and dust proof.*

